


WATERPROOF JUNCTION BOX
防水接线盒系列



JUNCTION BOX WITH RUBBER SEAL
防水接线盒（带橡胶塞）HR-RA

壳体材料：ABS
孔塞材料：PVC
产品特性：防水防尘，抗冲击，耐腐蚀，寿命长，
绝缘性能强等特殊场地。
执行标准：IEC60529 IP55 IP65
Box material:ABS
Stopper material:PVC
Product characteristics:Waterproof,dust-free
,shock resistance,and rustproof,long lifetime.
Implement standard:IEC60529 IP55 IP65

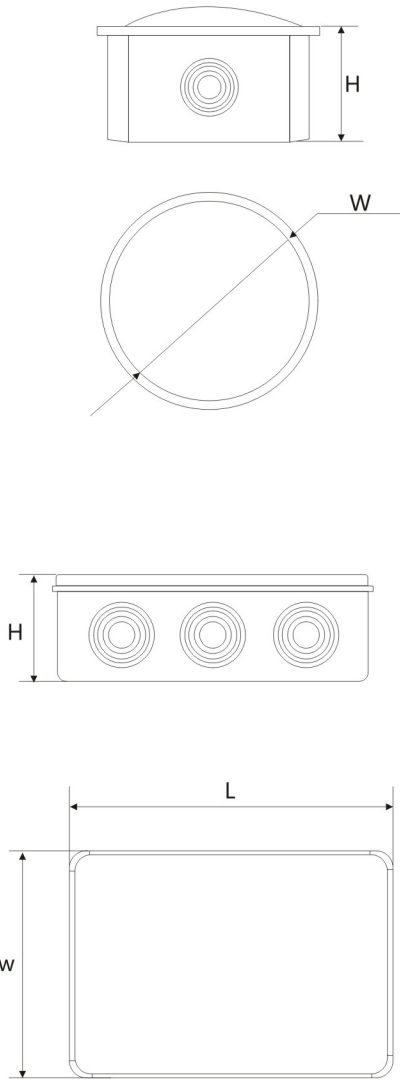


型号 Item NO.	长宽 高 L W H (mm)	孔数 Hole QTY.	孔径 (W) Hole Size (mm)	IP	毛重 GW (kg)	净重 NW (kg)	装箱数(只) QTY./CTN. (PCS.)	外箱尺寸 Carton Size (mm)
HR-RA	50*50	4	25	55	14	13	300	45.5*37.5*48
HR-RA	80*50	4	25	55	16	15	240	53*35*63
HR-RA	85*85*50	7	25	55	18	17	200	53*41*53
HR-RA	100*100*70	7	25	65	17	16	100	62*49*35
HR-RA	150*110*70	10	25	65	15	14	60	66*33*45.5
HR-RA	150*150*70	8	25	65	17	16	60	83.5*34*44
HR-RA	200*100*70	8	25	65	17	16	60	61*46*43
HR-RA	200*155*80	10	36	65	16	15	40	69.5*43.5*41
HR-RA	200*200*80	12	36	65	20	19	40	45*45*80
HR-RA	255*200*80	12	36	65	23	22	40	52*42*82
HR-RA	255*200*120	12	36	65	23	22	30	64*55*62
HR-RA	300*250*120	12	36	65	19	18	20	61.5*55.5*61
HR-RA	400*350*120	16	36	65	16	15	10	74.5*42.5*61.5

WATERPROOF JUNCTION BOX
防水接线盒系列



WATERPROOF JUNCTION BOX
防水接线盒HR-RT

壳体材料：ABS
产品特性：防水防尘，抗冲击，耐腐蚀，寿命长，
绝缘性能强等特殊场地。
执行标准：IEC60529 IP55 IP65
Box material:ABS
Product characteristics:Waterproof,dust-free
,shock resistance,and rustproof,long lifetime.
Implement standard:IEC60529 IP55 IP65

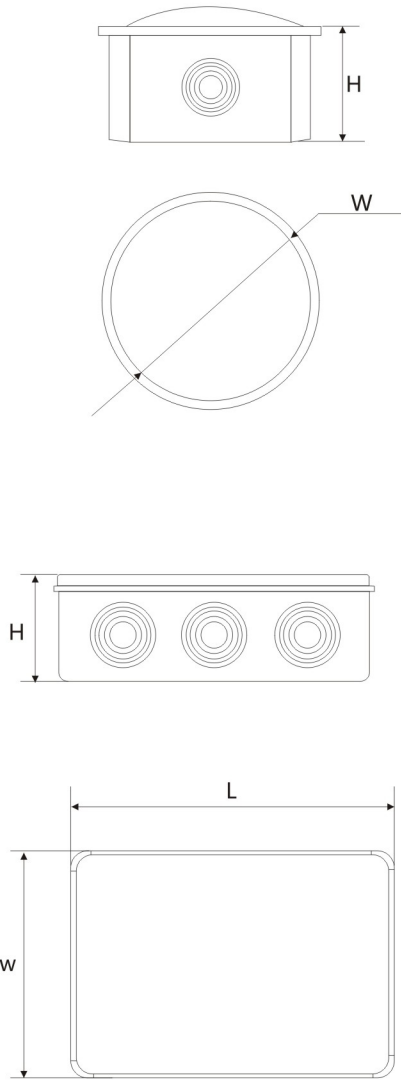

型号 Item NO.	长宽 高 L W H (mm)	孔数 Hole QTY.	孔径 (W) Hole Size (mm)	IP	毛重 GW (kg)	净重 NW (kg)	装箱数(只) QTY./CTN. (PCS.)	外箱尺寸 Carton Size (mm)
HR-RT	50*50	4	25	55	12	11	300	45.5*37.5*51
HR-RT	80*50	4	25	55	13	12	240	53*35*62
HR-RT	85*85*50	7	25	55	13	12	200	45.5*37.5*51
HR-RT	100*100*70	7	25	65	15	14	100	57*46*35
HR-RT	150*110*70	10	25	65	13	12	60	62*31.5*45
HR-RT	150*150*70	8	25	65	16	15	60	79*31*44
HR-RT	200*100*70	8	25	65	16	15	60	57*43*44.5
HR-RT	200*155*80	10	36	65	14	13	40	64.5*40.5*41
HR-RT	200*200*80	12	36	65	16	15	40	45*45*78
HR-RT	255*200*80	12	36	65	21	20	40	52*42*81
HR-RT	255*200*120	12	36	65	19	18	30	62*53*62
HR-RT	300*250*120	12	36	65	19	18	20	61*52*62
HR-RT	400*350*120	16	36	65	14	13	10	72*41*62